



90519069

BITS2POWER® Data Control Solution

Product description

- 48V Bits2Power Controller
- Powered by standard 48V Power Supplies
- Maximum Power to be connected xxx Watts
- Multiple Protocol Keys can be connected
- 3 Year Warranty
- CE certified
- IP20

Applied Standards


EN55022
EN55024

Technical notes

Dimensions	148x131x88mm
Weight	1 kg.
Housing	Stainless steel 430
Color	Blanc

Ordering data

Type	Article number
DCS	90519069

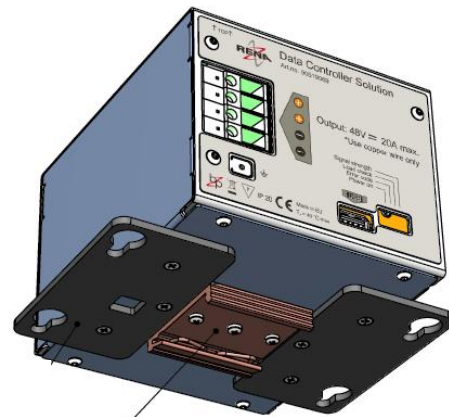

OPTION

Electrical Characteristics

Input voltage ①	48 Vdc
Output current max ①	20A
Standby power ②	2,5W

Protections

Overheating Protection	Automatic recovery
Output Current	Automatic dimming implemented in driver

Connections

Input voltage	AWG16 ... 10	
Output voltage	AWG16 ... 10	
I/O	USB	Firmware update
I/O slots	Protocol data key	Optional modules

Technical details




Output	DC voltage Range	48 V ①
	Maximum current	20 A ①
	DC voltage Range	48 V ①
Input	Maximum current	20 A ①
	Over Voltage	Input protected by TVS diode
	EMI	EN55022 (CISPR22)
	EMS IMMUNITY	EN55024, EN61000-4-2, 3, 4, 5, 6, 11

① Tolerance of 5%
② Nominal value
③ Tolerances of 5% and for each circuit




Mechanical Dimensions

Overall dimensions L = 148 x W = 131 mm
Height = 88 mm

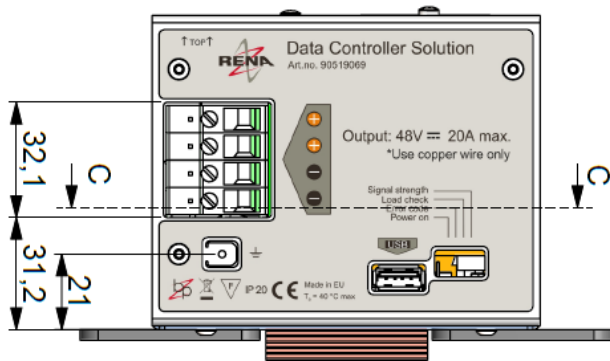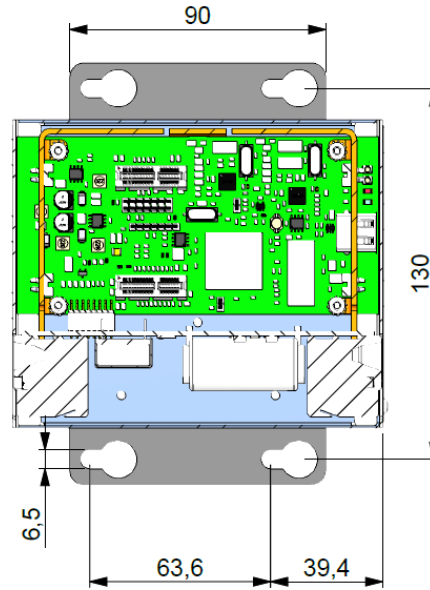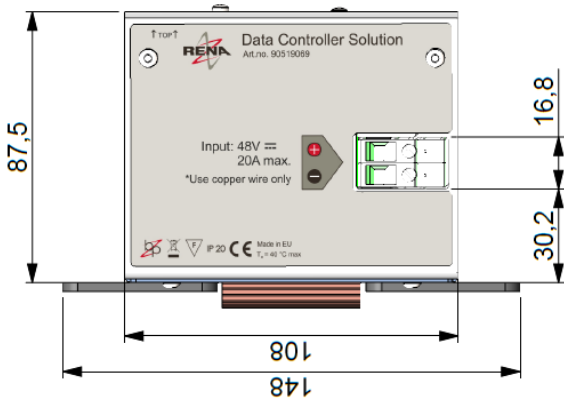

Packaging

Box size (mm)	370x170x125 mm
Quantity each Box	2
Weight each box (kg)	2,2 kg

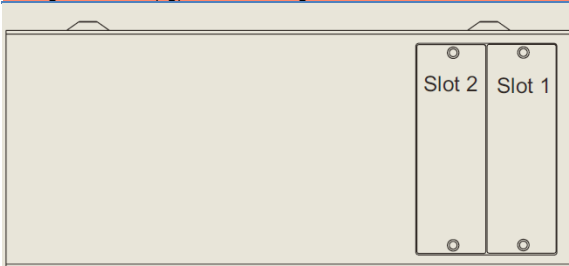

Module installation

Use screwdriver type PH1 for mounting optional modules into slot 1 and slot 2.

Thermal Characteristics

The controller must operate under proper environmental conditions and the operating ambient air temperature must NOT exceed the maximum given temperature.

For an optimal lifetime performance the controller must be placed in an environment where a sufficient heat transport is guaranteed. The heat transport is done by natural convection. It's not recommended to expose the module to direct sunlight or any other heat source.

Environmental characteristics

Storage temperature	-20 – +85°C
Operating temperature	-5 – +40°C
Operating humidity	10-95% RH
IP classification	IP20

Tc point

For an optimal lifetime performance the Tc point of the device must never exceed [75] degrees Celsius.

The maximum value must be determined under operating conditions in a thermally stable state and under worst-case conditions for the current application

Installation and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. The following advice must be followed:

- The device contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken.
- Use wire size of minimum AWG 20 for connecting the B2P system.
- Use wire size of minimum AWG 14 for connection to mains.
- Please ensure the correct polarity of the leads.
- For outdoor or damp locations, be aware of the IP classification. All above specifications must be met in order to qualify for the 3 year warranty.