

90519035

BITS2POWER® SINGLE CHANNEL LED DRIVER

Product description

- 1 Channel LED driver
- 350 / 500 / 700 / 1050 / 1200 / 1400 mA version
- 0 – 100% dimming
- Thermal protection
- 3 Year Warranty
- CE certified
- IP67

Applied Standards

EN55022
EN55024

Technical notes

Dimensions	156x38x25mm
Weight	170 gr.
Housing	Polycarbonate
Color	White (RAL9003)

Ordering data

Type	Article number
1-channel 350mA	90519035- 48D4835W67
1-channel 500mA	90519035- 48D4850W67
1-channel 700mA	90519035- 48D4870W67
1-channel 1050mA	90519035- 48D48105W67
1-channel 1200mA	90519035- 48D48120W67
1-channel 1400mA	90519035- 48D48140W67

^{er} Tolerance of 5%

[&] Nominal output voltage is # of LEDs x LED forward voltage; output voltage 1400mA < 36V

• Tolerances of 5% and for each circuit

○ PWM controlled outputs

■ To be determined

[®] 10% @ Vout < 3V (= 1 LED)

[®] @ LED voltage = 3V typical



Electrical Characteristics

Input voltage range ^{er}	24 ... 48Vdc
Efficiency	92%
Output voltage range &	3 ... Vin - 4 Vdc
Output current max •	see technical details
Output power max	see technical details
Output dimming range ○	0 – 100%

Protections

Undervoltage lockout	@ Vin < 20Vdc
Short circuit protection	Output current limit
Reversed polarity	Positive ↔ Negative
Reversed connection	Input ↔ Output
Overheating Protection	70°C Output derating
Overpower Protection	56W (1400mA version)

Connections

Input voltage	Positive	Orange	AWG20, 250mm
	Negative	Black	AWG20, 250mm
LEDS	Positive	Red/White	AWG20, 250mm

Technical details

Model	90519035-48D4835W67	90519035-48D4850W67	90519035-48D4870W67	
Output	DC voltage Range	3... Uin-4 V	3... Uin-4 V	3... Uin-4 V
	Rated current	350 mA	500 mA	700 mA
	Maximum Power	16 W	22 W	31 W
	Current tolerance	±2Ⓞ %	±2Ⓞ %	±2Ⓞ %
	PWM frequency	920 Hz	920 Hz	920 Hz
	Number of LEDs	1 ... 12Ⓞ	1 ... 12Ⓞ	1 ... 12Ⓞ
Input	DC voltage Range	24 ... 48 V	24 ... 48 V	24 ... 48 V
	Efficiency(full load)	92 %	92 %	92 %
	Standby Power	1 mW	1 mW	1 mW


Model	90519035-48D48105W67	90519035-48D48120W67	90519035-48D48140W67	
Output	DC voltage Range	3... Uin-4 V	3... Uin-4 V	3... Uin-4 (max 36) V
	Rated current	1050 mA	1200 mA	1400 mA
	Maximum Power	46 W	53 W	56 W
	Current tolerance	±2Ⓞ %	±2Ⓞ %	±2Ⓞ %
	PWM frequency	920 Hz	920 Hz	920 Hz
	Number of LEDs	1 ... 12Ⓞ	1 ... 12Ⓞ	1 ... 12Ⓞ
Input	DC voltage Range	24 ... 48 V	24 ... 48 V	24 ... 48 V
	Efficiency(full load)	92 %	92 %	92 %
	Standby Power	1 mW	1 mW	1 mW

All Models

Protection	Short Circuit	Recovers automatically after removing short
	Over Current	Input protected by unrecoverable fuse
	Over Voltage	Input protected by TVS diode
	Over Temperature	70°C (Output derating)
Safety & EMC	Withstand Voltage	I/P-O/P: 0,5kV
	Isolation Resistance	I/P-FG: >100Ω / 500VDC / 25°C / 70% RH
	EMI	EN55022 (CISPR22)
	EMS IMMUNITY	EN55024, EN61000-4-2, 3, 4, 5, 6, 11

Mechanical Dimensions

Overall dimensions L = 156 x W = 38 mm
Height = 25 mm

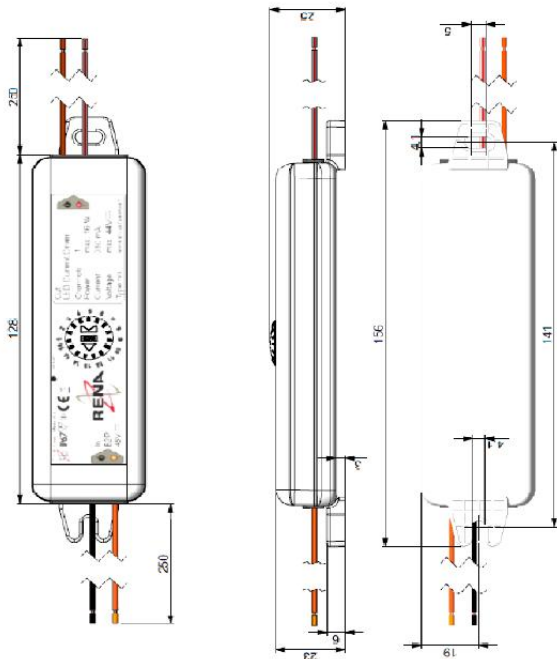

temperature.

For an optimal lifetime performance the LED driver must be placed in an environment where a sufficient heat transport is guaranteed.

The heat transport is done by natural convection. It's not recommended to expose the module to direct sunlight or any other heat source.

Environmental characteristics

Storage temperature	-20 – +70°C
Operating temperature	-20 – +50°C
Operating humidity	10-95% RH
IP classification	IP67

Tc point

For an optimal lifetime performance the Tc point of the device must never exceed [■] degrees Celsius.

The maximum value must be determined under operating conditions in a thermally stable state and under worst-case conditions for the current application

Installation and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. The following advice must be followed:

- See PDC600 controller manual for system installation details.
- The device contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken.
- Use wire size of minimum AWG 20 for connecting the B2P device.
- Please ensure the correct polarity of the leads.
- For outdoor or damp locations, be aware of the IP classification.

All above specifications must be met in order to qualify for the 3 year warranty.

Packaging

Box size (mm)	288x207x66 mm
Quantity each Box	12
Quantity each layer	12
Layer each box	1
Weight each box (kg)	2,1 kg

Thermal Characteristics

The LED driver must operate under proper environmental conditions and the operating ambient air temperature must NOT exceed the maximum given