

## MICRO DRIVER 90519077 IP50 SERIES

The 90519077 micro 1 channel LED driver is a direct alternative to the 90519035 mini LED driver providing the same functionality and features in a smaller package. It will fit through an 18mm square hole were the mini driver asks for a hole diameter of 28mm. Further changes were made with added removable mounting tabs. The 1 channel B2P micro driver can be used to drive any LED light source while supporting 0-100% dimming via the B2P protocol. A 4-channel DIP switch enables B2P address selection.

Visit [www.bits2power.com](http://www.bits2power.com) for more information about B2P.

### PRODUCT DESCRIPTION

- 1-channel B2P controllable
- Fits through 18mm square hole or 21mm round hole
- 48 volt operation, 250/350/500/700mA versions
- Deep 0-100% dimming
- 3 year warranty
- Wide operational temperature range
- CE certified
- IP50



### GENERAL CHARACTERISTICS

PARAMETER	CONDITIONS
Main Part Number	90519077
Dimensions	80 (103) x 18mm
Housing	Black PC
Temperature Range	-20 - +50°C Operating, -20-+70°C Storage
Environmental	IP50
Safety & EMC	EN55022, EN55024, EN61000-4-2,3,4,5,6,11

ORDERING INFORMATION	
5W, 120mA	90519077-48D4812W50
12W, 250mA	90519077-48D4825W50
16W, 350mA	90519077-48D4835W50
22W, 500mA	90519077-48D4850W50
31W, 700mA	90519077-48D4870W50

### ELECTRICAL CHARACTERISTICS

PARAMETER	MIN.	TYP.	MAX.
Input Voltage [V] DC	24	48	52
Output Current [mA] <sup>1</sup>	See ordering information for options		
Output Dim range[%] <sup>2</sup>	0-100%		
Output Voltage [V] <sup>3</sup>	2.8	-	V <sub>in</sub> - 4
Efficiency <sup>4</sup>	Up to 92%		
Standby Power	1mW		
PWM frequency	920Hz		

- 1) Tolerances of 5% and for each circuit
- 2) PWM type dimming
- 3) Nominal output voltage is # of LEDs x LED forward voltage
- 4) Dependent on input vs output voltage


### PROTECTIONS

PARAMETER	VALUE
Under voltage lock-out	Yes
Short circuit protection	Output Current Limit
Reverse polarity	Positive <-> Negative
Reverse connection	Input <-> Output
Over temperature	70°C output de-rating

### MODULE CONNECTIVITY

PARAMETER	COLOR	TYPE
Supply Input +	Orange	AWG20, 250mm
Supply Input -	Black	AWG20, 250mm
LED Output +	Red/White	AWG20, 250mm
LED Output -	Black/White	AWG20, 250mm

### SIMPLIFIED BLOCK DIAGRAM

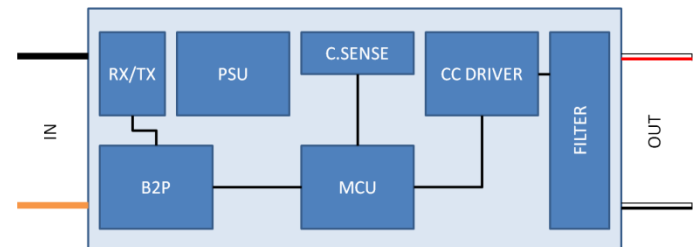

### MECHANICAL DIMENSIONS

